


# Gravostar 857

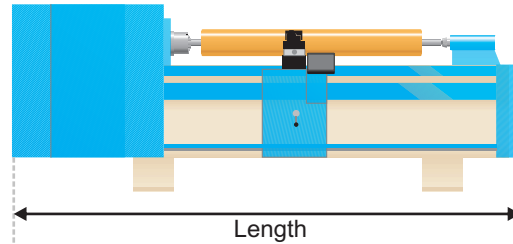

Machine Dimensions		GS857-136	GS857-148	GS857-187	GS857-220	GS857-260
Total Length		3.2 m	4.12 m	5.11 mm	5.95 M	6.96 M
Cylinder Dimensions		GS857-136	GS857-148	GS857-187	GS857-220	GS857-260
Shafted Cylinders						
Chuck with live center	Cylinder max <sup>1</sup>	1644 mm	1949 mm	2940 mm	3778 mm	4794 mm
	Face length max <sup>2</sup>	1644 mm	1949 mm	2940 mm	3778 mm	4794 mm
tailstock	Face length min	51 mm	51 mm	51 mm	51 mm	51 mm
	Cylinder weight max	400 kg for all units				
Chuck with bearings	Cylinder max	2337 mm	2642 mm	3632 mm	4470 mm	5486 mm
	Face length max <sup>3</sup>	1854 mm	2159 mm	3150 mm	3988 mm	5004 mm
	Face length min	51 mm	51 mm	51 mm	51 mm	51 mm
	Cylinder weight max	2700 kg for all units				
Shaftless Cylinders						
Chuck with cone and tailstock	Cylinder max	1352 mm	1657 mm	2648 mm	3486 mm	4502 mm
	Face length max.					
with cone	Face length min.	89 mm	89 mm	89 mm	89 mm	89 mm
	Cylinder weight max	400 kg for all units				

<sup>1</sup> Heavy duty tailstock reduces cylinder length dimensions by 75 mm.

<sup>2</sup> Minus two shaft lengths.

<sup>3</sup> Minus one shaft for maximum engraving width.

Loading Clearance: 35 mm per end

Electrical Data: Power supply: 1 x 240 V +/-3%, 50 or 60 Hz Power consumption: 4 kVA

Ohio Gravure Technologies Inc. • 2133 Lyons Road • Miamisburg Ohio 45432 USA  
 Phone: (937) 428 1700 • Email: sales@OhioGT.com • Web: www.OhioGT.com